



Flight Light Inc.
 2708 47th Ave.
 Sacramento, California, U.S.A.
 95822-3806



**Series Isolation
 Transformers
 FAA L-830 / L-831**

PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM sales@flightlight.com

Compliance and Applications

FAA L-830, AC 150/5345-47
 Series isolation transformers are used to isolate high operating voltages for constant current lamps in series circuits.

Features

- Our transformers are made of flat laminations in an ETI formation for 6.6A and 20A applications.
- Encapsulated in synthetic rubber for durability and dielectric strength. Waterproof assembly suitable for above ground installation or direct burial.
- Two Primary Leads: terminated with molded L-823 Style 2 (male) and Style 9 (female) connectors. Standard length 24", 8/1 cable. Rated to 25A and 5,000V.

- One Secondary Lead: terminated with a molded L-823 Style 8 (female) connector, "ball-type". Optional Style 7 (female) connector, "straight design" for use with signs and extension cords. Standard length 48", 12/2 600V cable. Rated to 20A and 600V.
- Optional ground (earthing) lead (1). 36" long #12 AWG 600V ground lead, terminated in a ring terminal. To order add the letter G to the model number.
- All transformers undergo 100% quality testing before they are shipped: visual inspection, HIPOT after heating and 12 hour soaking (15,000V primary, 5,000V secondary), and ratio testing.



Isolation Transformer

Product Specifications:

FAA 60 Hz Part #	FAA 50 Hz* Part #	Watts	Prim. Amps	Sec. Amps	Weight (lb.)	Volume (cu. ft.)
TR-L830-1	TR-L831-1	30/45W	6.6	6.6	6.5	.2
TR-L830-2	TR-L831-2	30/45W	20	6.6	6.5	.2
TR-L830-3	TR-L831-3	65W	6.6	6.6	7	.2
TR-L830-4	TR-L831-4	100W	6.6	6.6	10	.4
TR-L830-5	TR-L831-5	100W	20	6.6	10	.4
TR-L830-6	TR-L831-6	200W	6.6	6.6	11	.4
TR-L830-7	TR-L831-7	200W	20	6.6	11	.4
TR-L830-8	TR-L831-8	300W	6.6	20	22	.6
TR-L830-9	TR-L831-9	300W	20	20	22	.6
TR-L830-10	TR-L831-10	300W	6.6	6.6	22	.6
TR-L830-11	TR-L831-11	300W	20	6.6	22	.6
TR-L830-12	TR-L831-12	500W	20	6.6	24	.7
TR-L830-13	TR-L831-13	500W	20	20	24	.7
TR-L830-14	TR-L831-14	500W	6.6	6.6	24	.7
TR-L830-16	TR-L831-16	10/15W	6.6	6.6		
TR-L830-17	TR-L831-17	20/25W	6.6	6.6		
TR-L830-18	TR-L831-18	150W	6.6	6.6	11	.4

* To order ground (earthing) lead add the letter G to the model number.

Visit our web site: www.flightlight.com



Flight Light Inc.
2708 47th Ave.
Sacramento, California, U.S.A.
95822-3806



PH (916) 394-2800 FX (916) 394-2809
TF (800) 806-3548 EM sales@flightlight.com



3M
Heat Shrink Kits "HSK"

Application and Description

The Heat Shrink Kit is a heat-shrinkable tubing for insulating and sealing electrical connections. The medium wall tubing is designed for a variety of low voltage cable applications where lighter weight and greater flexibility are important. The tubing is made from a thermally stabilized, modified polyolefin.

Why Our Heat Shrink Kit is Better

- Mechanical protection: high impact and abrasion resistance of tubing provides excellent mechanical protection. It also provides additional strain relief.
- Environmental seal: sealant provides excellent waterproofing and environmental protection in submersible and buried applications.
- Superior adhesion: thermoplastic adhesive will adhere to all standard plastic, elastomeric insulating material, lead, steel, aluminum and copper.
- Easy to install: when heated above 250°F (121°C), the tubing shrinks rapidly to seal and encapsulate electrical connections. This provides a fast, simple and clean insulation system. The tubing will not split or rupture during normal installation, even when overheated.

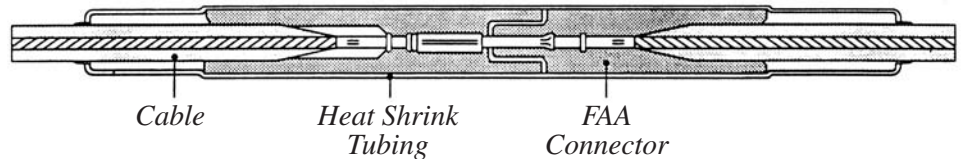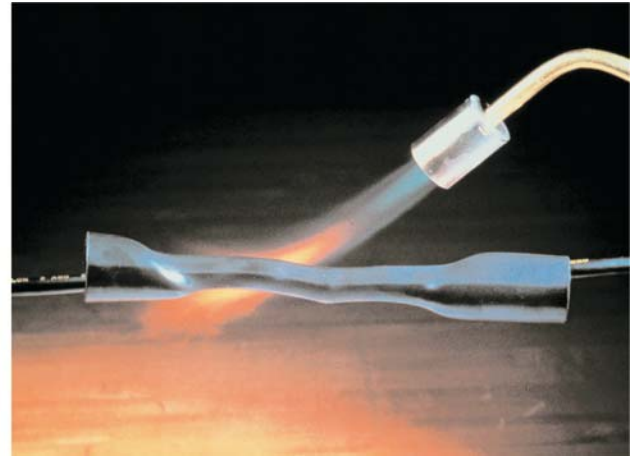

Specifications

- Model Number: TRH-HSK-1.5
- Material: Polyolefin
- Shrink Ratio: 3:1
- Inner Diameter Before Shrink: 1.5" (38.1 mm)
- Inner Diameter After Shrink: 0.5" (12.7 mm)
- Lining: Adhesive-Lined
- Wall Thickness After Shrink: 0.1" (2.54 mm)
- Overall Length: 16" (40.6 cm)
- Dielectric Strength: 500 mV
- Color: Black
- Shrink Temperature: +250°F (+121°C)
- Maximum Operating Temperature: 230°F (110°C)
- Operating Temperature Range: -67°F to +230°F (-55°C to +110°C)
- Standards Met: SAE-AMS-DTL-23053/15, Class 2
- Adhesive Material: Hot Melt Adhesive
- Cable Size Range: 1/0 AWG-250 kcmil
- Tensile Strength: 2400 psi
- Voltage Rating: 1 kV

Visit our web site: www.flightlight.com