


D-Lux LED Sign VA Loads: AGM vs. ADB (Siemens)



Siemens - ADB LED Signature VA Loads						AGM D-Lux LED VA Loads					
Sign Size	Style	Sign No. of Modules	L830 Transformer	Power Factor	Volt Amp - VA Load	Sign Size	Style	Sign No. of Modules	L830 Transformer	Power Factor	Volt Amp - VA Load
1	2	1	200	0.84	68	1	2	1	45	1.00	30
1	2	2	200	0.88	86	1	2	2	65	1.00	60
1	2	3	200	0.88	120	1	2	3	65	1.00	70
1	2	4	200	0.90	138	1	2	4	100	1.00	80
2	2	1	200	0.82	84	2	2	1	65	1.00	60
2	2	2	200	0.91	92	2	2	2	100	1.00	70
2	2	3	300	0.91	189	2	2	3	100	1.00	100
2	2	4	300	0.91	227	2	2	4	200	1.00	120
3	2	1	200	0.82	84	3	2	1	65	1.00	60
3	2	2	200	0.91	92	3	2	2	100	1.00	70
3	2	3	300	0.91	189	3	2	3	100	1.00	100
3	2	4	300	0.91	227	3	2	4	200	1.00	120
4	2	1	200	0.83	66	4*	2	1	65	1.00	60
*Size 4 is I-Lux Series Design											
1	3	1	200	0.83	66	1	3	1	45	1.00	30
1	3	2	200	0.84	86	1	3	2	65	1.00	60
1	3	3	200	0.89	105	1	3	3	100	1.00	70
1	3	4	300	0.88	146	1	3	4	100	1.00	80
2	3	1	200	0.82	83	2	3	1	65	1.00	60
2	3	2	300	0.88	118	2	3	2	100	1.00	70
2	3	3	500	0.85	206	2	3	3	200	1.00	100
2	3	4	500	0.88	234	2	3	4	200	1.00	120
3	3	1	200	0.82	83	3	3	1	65	1.00	60
3	3	2	300	0.88	118	3	3	2	100	1.00	70
3	3	3	500	0.85	206	3	3	3	200	1.00	100
3	3	4	500	0.88	234	3	3	4	200	1.00	120
4	3	1	200	0.84	86	4*	3	1	65	1.00	60
*Size 4 is I-Lux Series Design											
1	5	1	100	0.89	63	1	5	1	45	1.00	30
1	5	2	100	0.88	84	1	5	2	65	1.00	60
1	5	3	100	0.90	105	1	5	3	65	1.00	70
1	5	4	200	0.90	124	1	5	4	100	1.00	80
2	5	1	100	0.83	71	2	5	1	65	1.00	60
2	5	2	200	0.90	101	2	5	2	100	1.00	70
2	5	3	300	0.86	166	2	5	3	100	1.00	100
2	5	4	500	0.87	205	2	5	4	200	1.00	120
3	5	1	100	0.82	71	3	5	1	65	1.00	60
3	5	2	200	0.91	101	3	5	2	100	1.00	70
3	5	3	300	0.91	166	3	5	3	100	1.00	100
3	5	4	500	0.91	205	3	5	4	200	1.00	120
4	5	1	100	0.88	84	4*	5	1	65	1.00	60
*Size 4 is I-Lux Series Design											

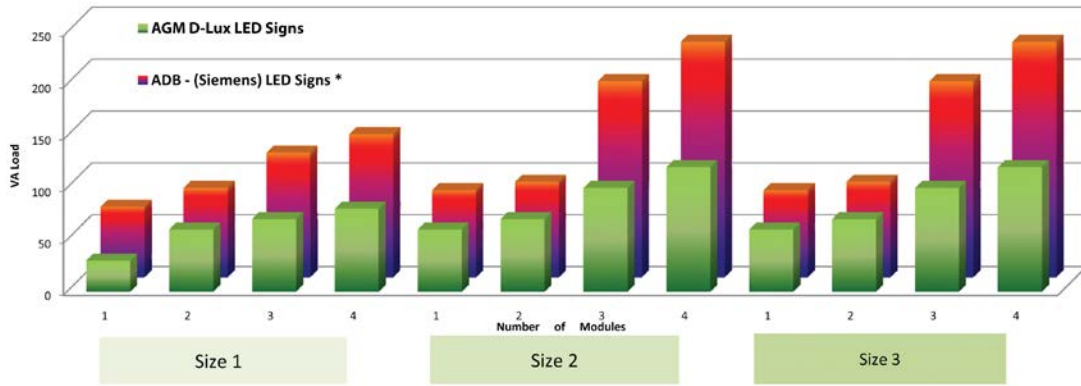

PH (916) 394-2800
TF (800) 806-3548
FX (916) 394-2809
info@flightlight.com
www.flightlight.com